

Ground Terminal Blocks

JUSLKG 2.5

Approval	CE 
Insulating Material	PA66
Inflammability Class	UL 94 V ₀
Connection Standard	IEC 60947-7-2
Zack Strip	ZB6
Order Code	1010.028




Technical Data

size	T6.2×H42×W42.5
rated current	32A
solid cross section (min)	0.2mm ²
solid cross section (max)	4mm ²
stranded cross section (min)	0.2mm ²
stranded cross section (max)	2.5mm ²
packing	50
connection type	screw connection
Din Rail type	NS 35/7.5 NS 35/15 NS 32

JUSLKG 3

Approval	CE 
Insulating Material	PA66
Inflammability Class	UL 94 V ₀
Connection Standard	IEC 60947-7-2
Zack Strip	ZB5
Order Code	1010.029

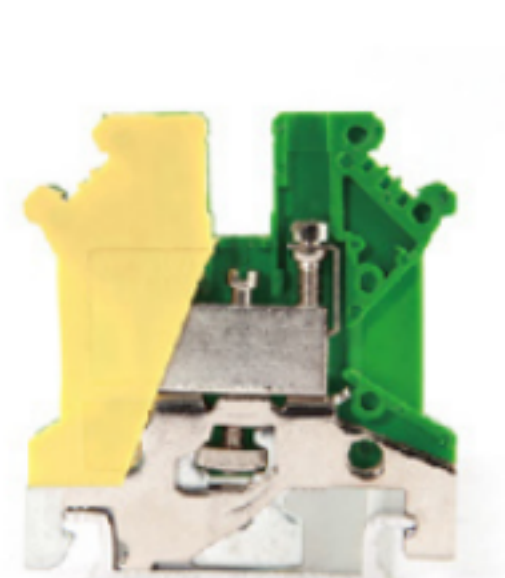

size	T5.2×H47×W42.5
rated current	34A
solid cross section (min)	0.2mm ²
solid cross section (max)	4mm ²
stranded cross section (min)	0.2mm ²
stranded cross section (max)	2.5mm ²
packing	50
connection type	screw connection
Din Rail type	NS 35/7.5 NS 35/15 NS 32

JUSLKG 5

Approval	CE 
Insulating Material	PA66
Inflammability Class	UL 94 V ₀
Connection Standard	IEC 60947-7-2
Zack Strip	ZB6
Order Code	1010.030



Technical Data

size	T6.2×H47×W42.5
rated current	34A
solid cross section (min)	0.2mm ²
solid cross section (max)	4mm ²
stranded cross section (min)	0.2mm ²
stranded cross section (max)	4mm ²
packing	50
connection type	screw connection
Din Rail type	NS 35/7.5 NS 35/15 NS 32

JUSLKG 6

Approval	CE 
Insulating Material	PA66
Inflammability Class	UL 94 V ₀
Connection Standard	IEC 60947-7-2
Zack Strip	ZB8
Order Code	1010.031



size	T8.2×H47×W42.5
rated current	37A
solid cross section (min)	0.2mm ²
solid cross section (max)	10mm ²
stranded cross section (min)	0.2mm ²
stranded cross section (max)	6mm ²
packing	50
connection type	screw connection
Din Rail type	NS 35/7.5 NS 35/15 NS 32

Approval	CE 
Insulating Material	PA66
Inflammability Class	UL 94 V ₀
Connection Standard	IEC 60947-7-2
Zack Strip	ZB10
Order Code	1010.032



Approval	CE 
Insulating Material	PA66
Inflammability Class	UL 94 V ₀
Connection Standard	IEC 60947-7-2
Zack Strip	ZB10
Order Code	1010.033




Technical Data

size	T10.2×H47×W42.5	T12.2×H47×W43
rated current	76A	101A
solid cross section (min)	0.5mm ²	2.4mm ²
solid cross section (max)	16mm ²	25mm ²
stranded cross section (min)	0.5mm ²	4mm ²
stranded cross section (max)	10mm ²	16mm ²
packing	50	50
connection type	screw connection	screw connection
Din Rail type	NS 35/7.5 NS 35/15 NS 32	NS 35/7.5 NS 35/15 NS 32


JUSLKG 35

JUSLKG 50

Approval	CE 
Insulating Material	PA66
Inflammability Class	UL 94 V ₀
Connection Standard	IEC 60947-7-2
Zack Strip	ZB10
Order Code	1010.034

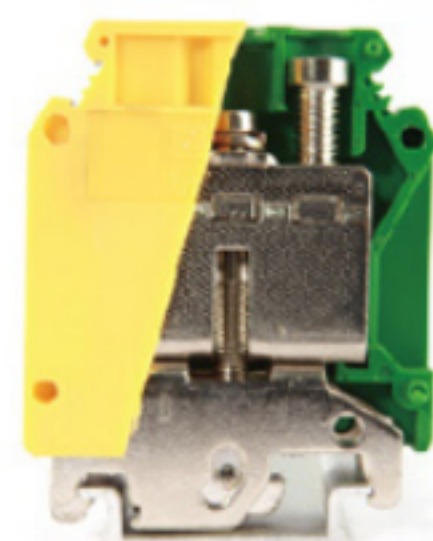

Approval	CE 
Insulating Material	PA66
Inflammability Class	UL 94 V ₀
Connection Standard	IEC 60947-7-2
Zack Strip	ZB10
Order Code	1010.035

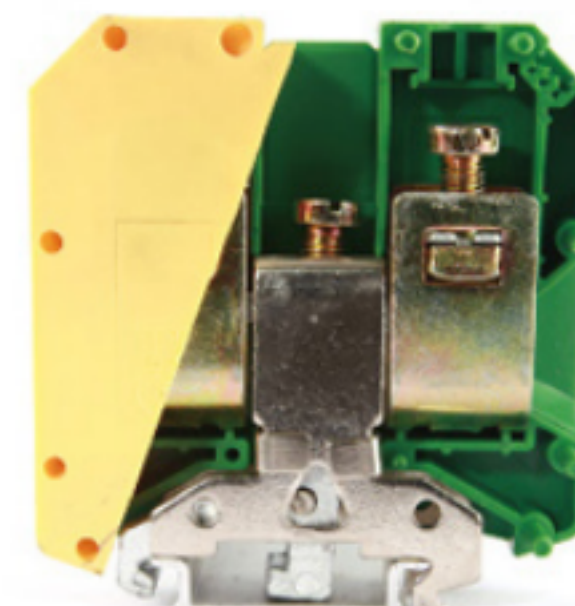

Technical Data

size	T15.2×H62×W50	T20×H83.5×W71
rated current	125A	150A
solid cross section (min)	10mm ²	16mm ²
solid cross section (max)	35mm ²	50mm ²
stranded cross section (min)	10mm ²	25mm ²
stranded cross section (max)	35mm ²	50mm ²
packing	50	10
connection type	screw connection	screw connection
Din Rail type	NS 35/7.5 NS 35/15 NS 32	NS 35/7.5 NS 35/15 NS 32