

| Certification | Case Material | Protection class | Order Code |
|---------------|---------------|------------------|------------|
| CE RoHS       | ABS           | IP20             | 2021.004   |


A thermostat with two temperature settings.

Normally Open contact: commonly used in the monitoring filter fans, heat exchangers, or when the temperature exceeds the set value, the closed circuit output signal.

Normally Closed contact: commonly used in connecting the heater, when the temperature reaches the set value, the broken line.



Dimensions

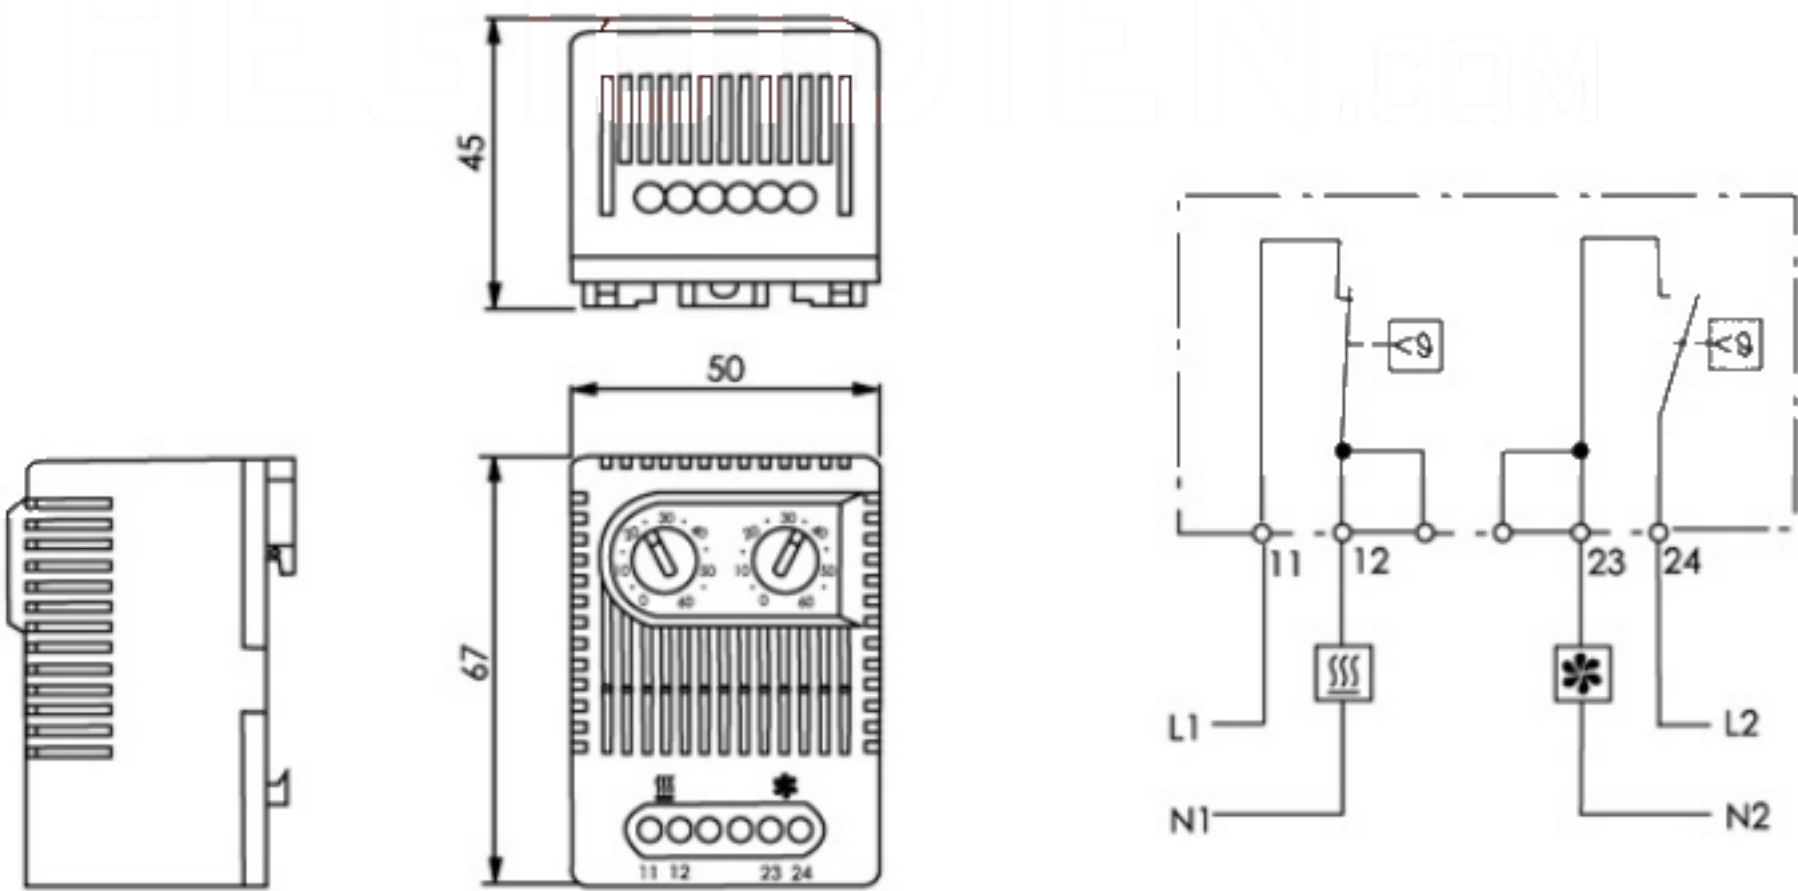

Technical data

|                                 |                                              |
|---------------------------------|----------------------------------------------|
| Temperature range               | 0-60℃                                        |
| Switching temperature tolerance | 7K (± 4K)                                    |
| Sensing element                 | Bimetallic                                   |
| Maximum switching capacity      | 250VAC, 10 (2) A / 120VAC, 15 (2) A / DC 30W |
| Electrical connection           | 4-pole 2.5mm, 0.8Nm                          |
| Installation                    | 35mm DIN rail mounting                       |
| Terminal                        | UL94V0                                       |
| Weight                          | 90g                                          |
| Size                            | 69X50X46mm                                   |
| Operating / storage areas       | -5℃ to +80℃                                  |