

Hygrostat


JWT 6013

Certification	Case Material	Protection class	Order
CE RoHS	ABS	IP20	2021.005

Electromechanical humidity controller for the relative humidity exceeds 65%, by controlling the temperature inside the heater to improve, thus avoiding the occurrence of moisture and corrosion.



Drawing

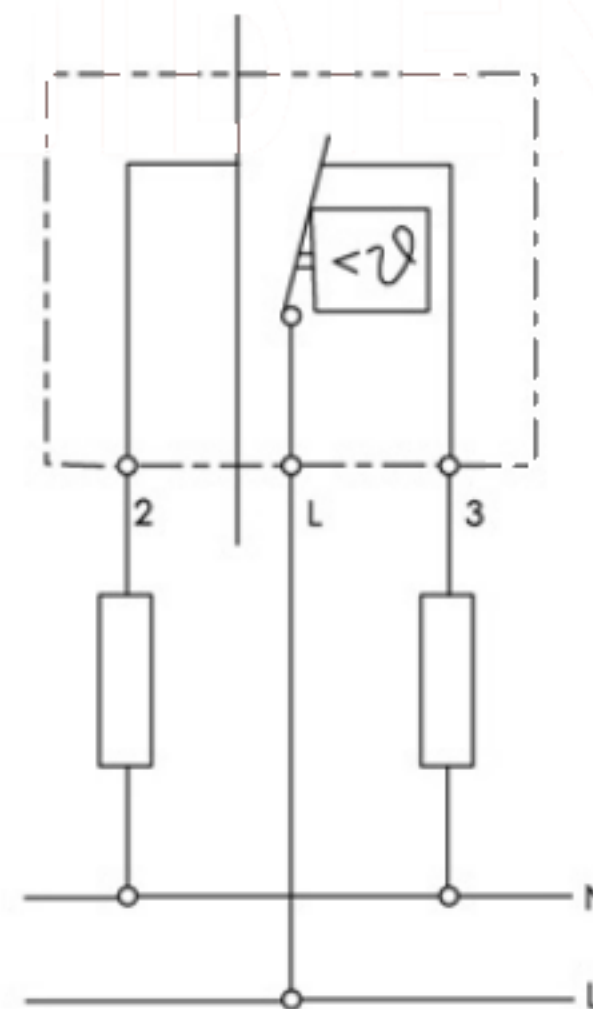

Technical data

Operating humidity	30-90% RH
Switch tolerance	4% RH ($\pm 3\%$)
Allow air rate	15 m / s
Maximum switching capacity	250VAC, 5 (0.2) A / DC 20W
Electrical connection	3-pole 2.5mm, 0.8Nm
Installation	35mm DIN rail mounting
Terminals	UL94V0
Size	67X50X38mm
Operating / storage areas	-20°C to +80°C