



Certification	Impeller	Protection class
CE	Black plastic PBT	IP34

- **Frame** Aluminum alloy die-casting, surfaces is finished by black anti-corrosion treatment.
- **Impeller** Black plastic PBT UL94V-0
- **Operation Temperature/Humidity Range:**
-40℃ ~+65℃ (temperature) 0%~95%(humidity)
- **Protection** Impedance Protected
- **Withstand Voltage** AC 1,500V, 1 min at 0.5mA, 50/60 Hz
- **Insulation Grade** Design according to IEC61858 Grade B,



92×92×25mm

Dimensions

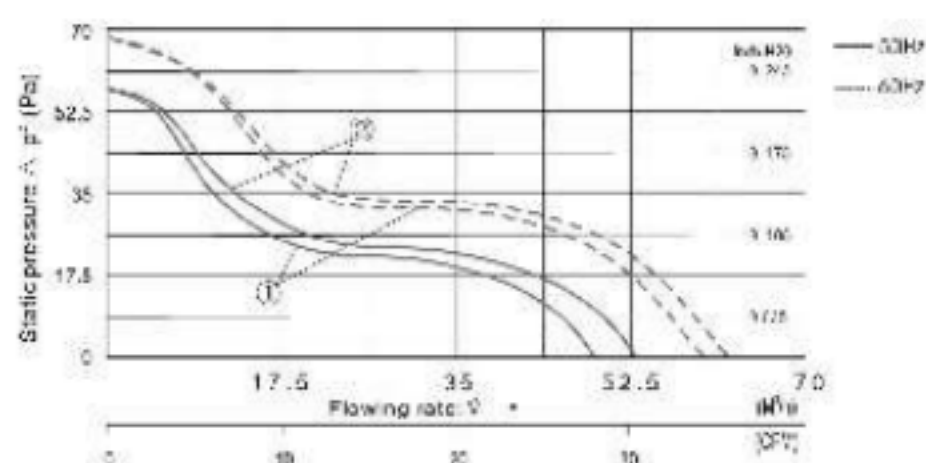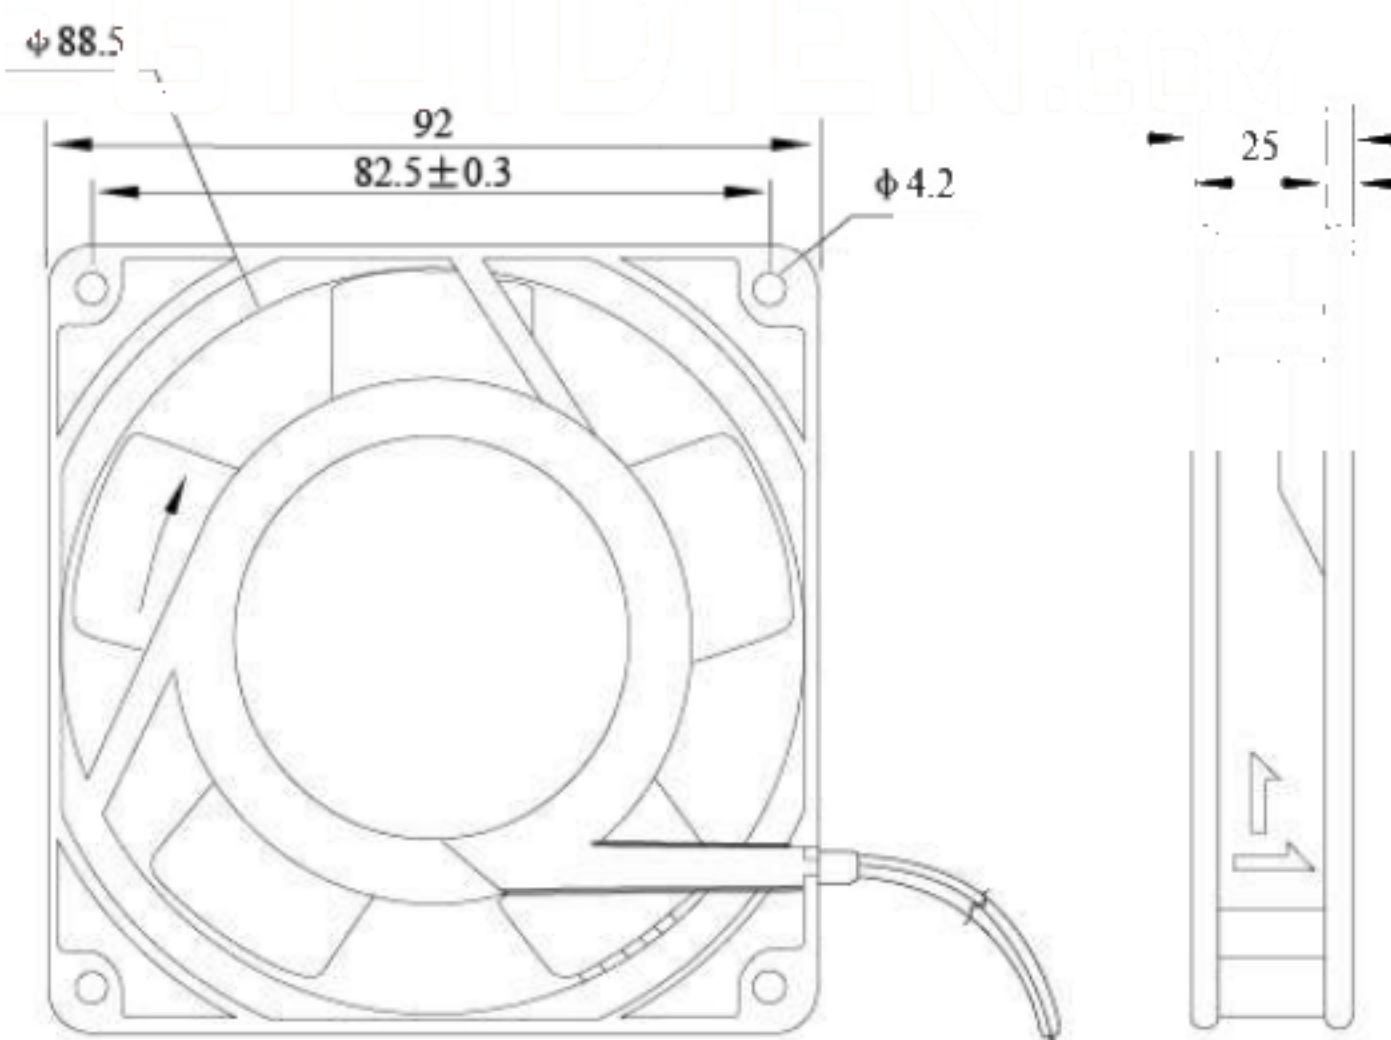

1. Rotation direction of blades: CCW seen from the front impellers
2. Power Connection: UL3385-22 Lead wire
3. Unit weight: 0.27kg

Model	Order Code	Bearing	Voltage V	Frequency Hz	Current (A)	Power (W)	Speed (r/min)	Air Flow (m³/h)	Noise (dB)	Weight (kg)
F2E-92S-230	2018.003	Sleeve	220/230	50/60	0.07/0.06	13/11	2400/2500	39/48	37	0.27
F2E-92B-230	2018.005	ball								
F2E-92S-115	2018.004	Sleeve	110/115	50/60	0.12/0.10	13/11	2400/2500	39/48	37	0.27
F2E-92B-115	2018.006	ball								